


LED Street light 45W/75W/150W with IP66 rated



JG-S604

8.66X11.42*4.72 inch
13.78X11.42*4.72 inch
26.77X11.42*4.72 inch

JG-S604 compared to high pressure sodium lighting


- Significant improvements on CRI
- Eliminate the maintenance needs

Applications

- Street lighting
- Tunnel lighting
- Parking lot lighting
- Plaza lighting
- Construction site/work site
- Industrial areas/ camp

Features

- IP66 rated
- Aluminum case with hard anodizing
- Looseness-proof design , make it very reliable under rough weather condition
- Patented reflector design, accurate & wide light distribution
- Patented heat dissipation design, with optimum luminaries efficiency
- Wide voltage input From AC 85V to 265V. Remove the power supply, it can work with solar system

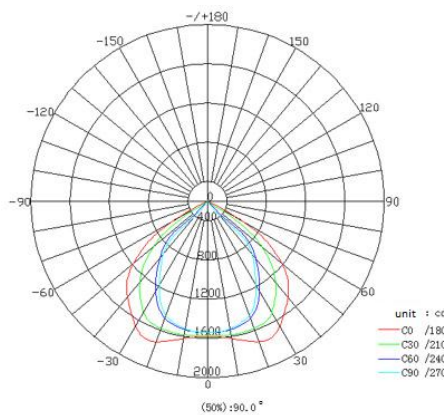

Performance Parameters

Street light	Light color type	Color temperature Min	Color temperature Max	Lumen(Cree)	Intensity of illumination at 32.8ft height	Color Rendering Index	Input Volt	Power	PF	Efficiency	Lifespan*	Beam angles	Dimension	Housing color	Weight (lbs)
S604-36W	Cool White	6000K	6500K	1860LM	9.3LX	>80	AC85-264V or DC 12-24V	45W	>0.9	>80LM/W	≥50000Hrs	90°(50%)	8.66X11.42*4.72 inch	Sliver	13.23
S604-60W	Cool White	6000K	6500K	3100LM	15.5LX	>80	AC85-264V or DC 12-24V	75W	>0.9	>80LM/W	≥50000Hrs	90°(50%)	13.78X11.42*4.72 inch	Sliver	15.76
S604-120W	Cool White	6000K	6500K	6200LM	31LX	>80	AC85-264V or DC 12-24V	150W	>0.9	>80LM/W	≥50000Hrs	90°(50%)	26.77X11.42*4.72 inch	Sliver	22.05
S604-S60W	Cool White	6000K	6500K	3100LM	15.5LX	>80	AC85-264V or DC 12-24V	75W	>0.9	>80LM/W	≥50000Hrs	90°(50%)	13.78X11.42*4.72 inch	Sliver	15.76